

## 5. Securing to the ground

Locate gazebo is in the desired position. For each corner of the wall panels Loop a zip tie through the bottom most zip tie and through the eye of a peg. Push the peg into the ground and tighten the zip tie.

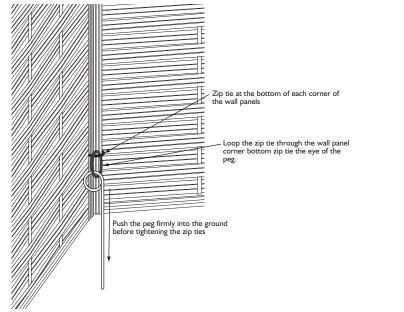

## 6. Tighten all zip ties

Finish by fully tightening all the zip ties and if needed trim of the excess tails of the ties.



If in doubt of any aspect regarding the assembly, use or safety of your gazebo please contact us : Help Line (Normal Office Hours) 01829 261 121

ROWLINSON GARDEN PRODUCTS LIMITED Green Lane Wardle Nr. Nantwich Cheshire CW5 6BN We constantly improve the quality of our products, occasionally the components may differ from the components shown and are only correct at time of printing. We reserve the right to change the specification of our products without prior notice.

2006 © Rowlinson Garden Products Ltd



# Willow Gazebo

# English SSI58B

# Assembly Instructions

#### **Before assembly**

- We recommend that time is taken to read the instructions before starting assembly, then follow the easy step by step guide. The instruction sheet is only a guide to the assembly. Certain items may not be shown to scale.
- Check all components prior to assembly
- This product should be assembled by no less than 2 people.
- Never attempt to erect the assembly in high winds.



#### **Recommended tools for assembly**

- Step Ladder
- Pliers




The willow Gazebo is best positioned in a sheltered area of the garden, it is recommended that this gazebo be taken down if high winds are forecast.

A large build up of snow on the roof may cause collapse. During snowy weather regularly brush the snow of the roof. It is recomended to take the gazebo down if snow is forecast.

| No. | Components   | Qty. |
|-----|--------------|------|
| I   | Door Panel   | I    |
| 2   | Window Panel | 4    |
| 3   | Back Panel   | Ι    |
| 4   | Roof Panel   | 6    |
| 5   | Finial       | Ι    |
| 6   | Pegs         | 6    |
|     |              |      |

| No. | Fixing kit | Qty. |
|-----|------------|------|
| 7   | Zip ties   | 100  |






0






# I. Wall panels assembly

Open out the six wall panels and arrange into a hexagon shape. Secure the two open ends together using four zip ties, do not fully tighten the ties at this stage.

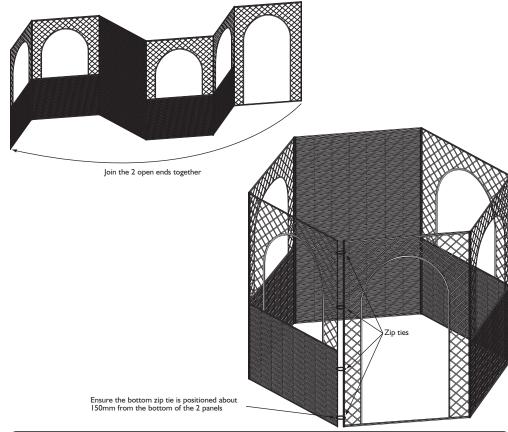


#### 2. Roof panels assembly

Open out the roof panels and arrange into a six sided cone shape. Secure the two open ends using three zip ties, Do not fully tighten the zip ties at this Stage.

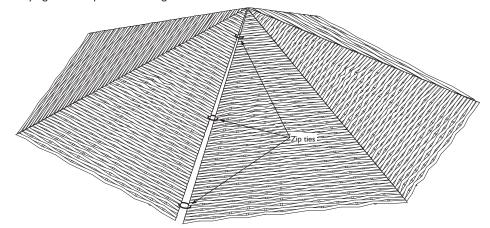

#### 3. Finial

Position the finial Centrally onto the point of the roof panels and secure using two zip ties.

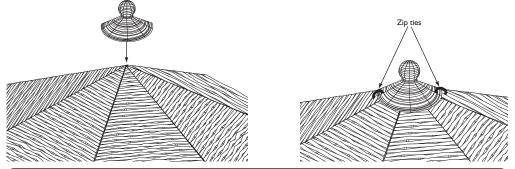

# 4. Roof to Wall panels

Lift the roof onto the wall panels, ensure that the corners of the roof line up with the corners of the walls. Adjust the wall panels making sure they are standing straight with the roof sitting centrally with an equal overhang all round. Once in position secure each roof panels to the wall it's sitting on using two zip ties.

